


PROPELLER SAFETY FEATURES (PLF)

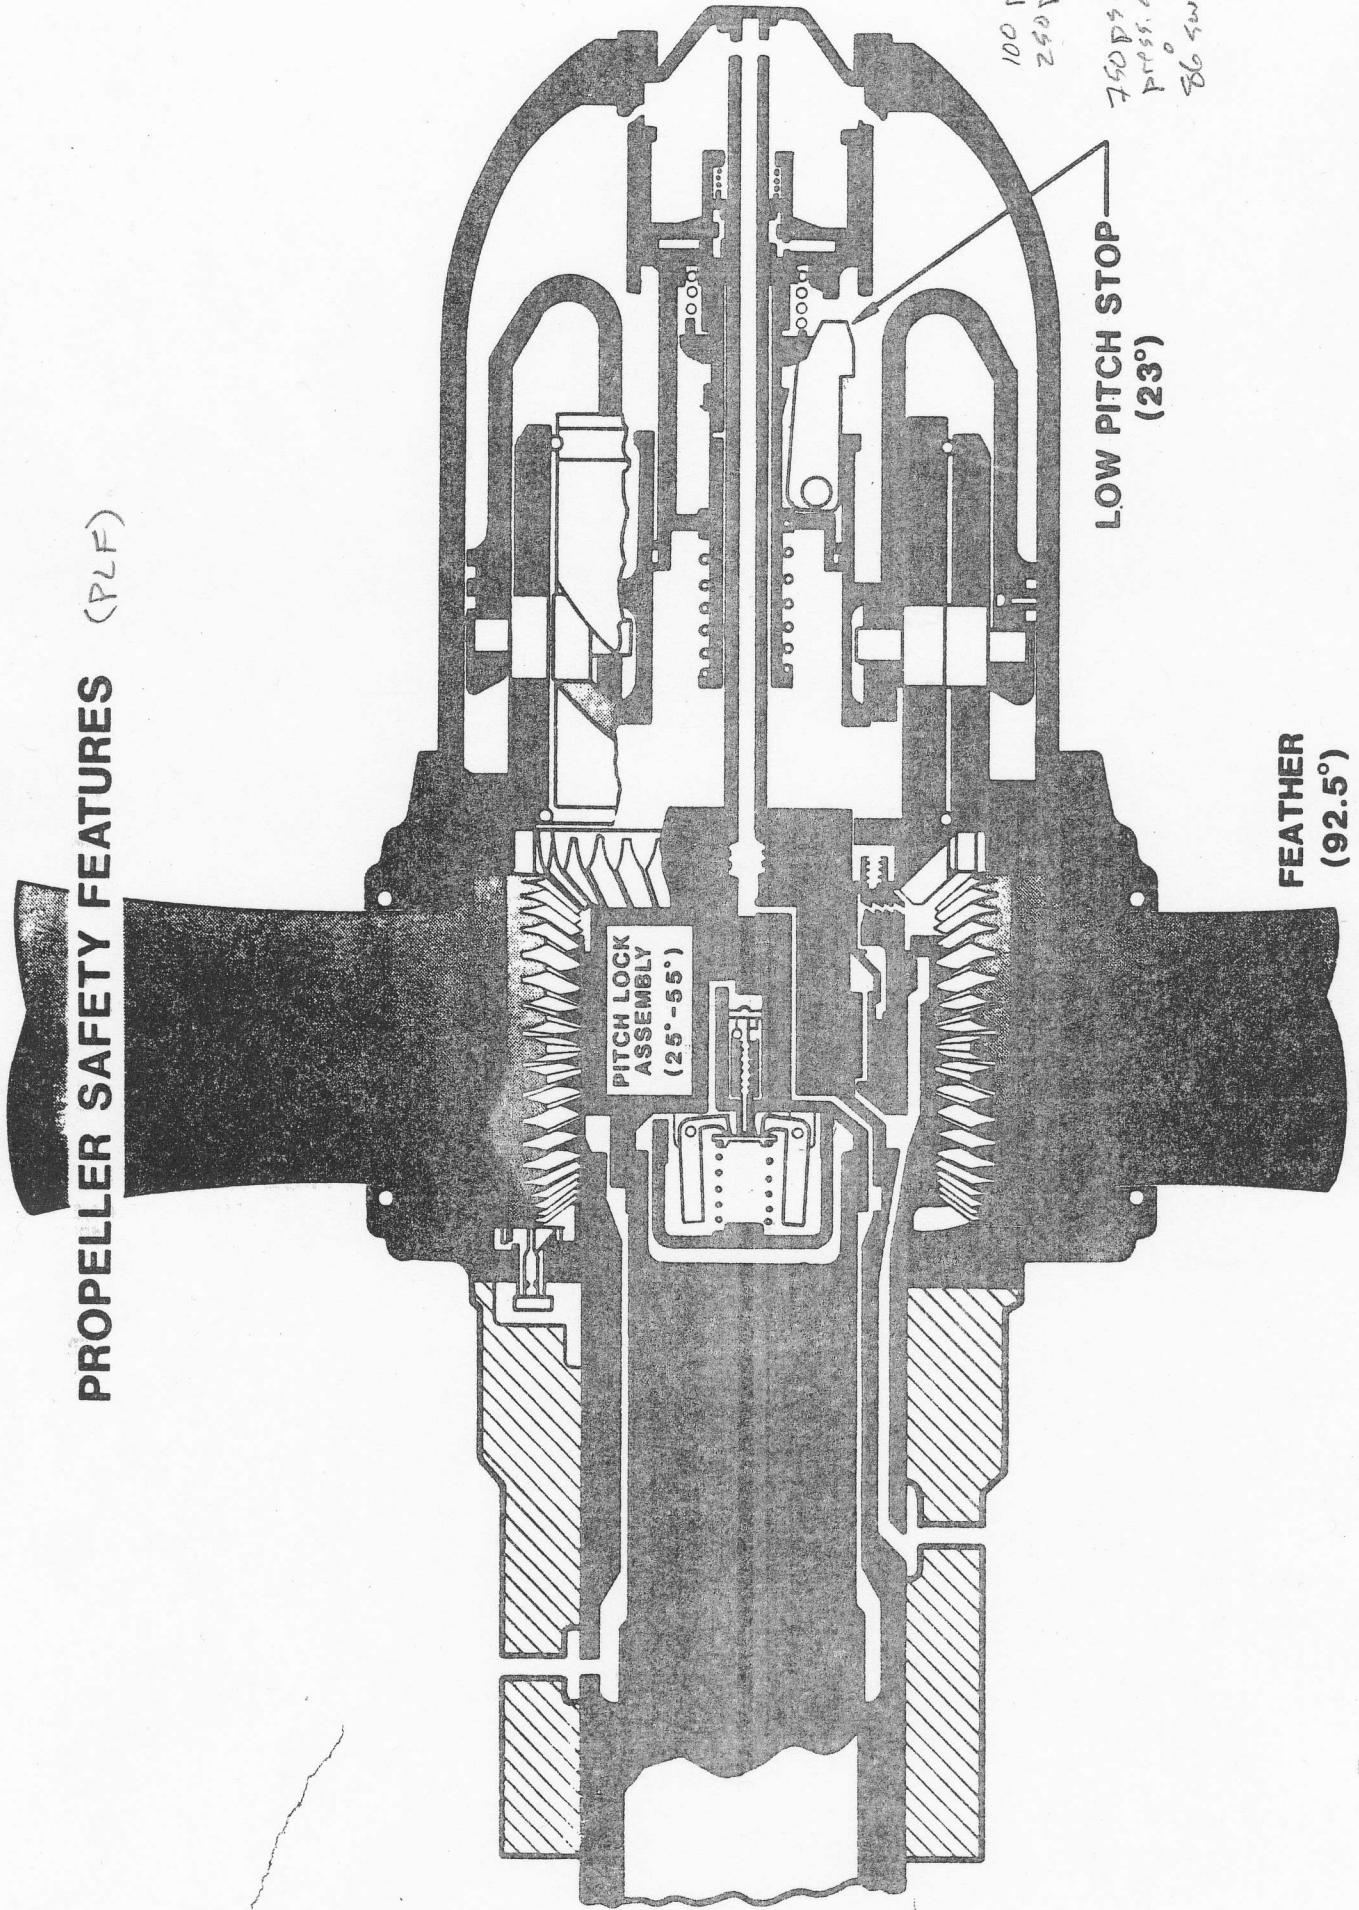

100 psi
250 psi back

750 psi
press. cutout
86 switch

PITCH LOCK
ASSEMBLY
(25°-55°)

FEATHER
(92.5°)

LOW PITCH STOP
(23°)